

SERIES

5DF

PLATFORM



5095 // 5105 // 5115 DF
PLATFORM
EPA





SERIES 5 DF PLATF

CLEAN POWER FOR TOMORROW'S AGRICULTURE

The FARMotion 45 engines optimize performance in DEUTZ-FAHR 5 DF Platform tractors, maintaining compactness while meeting EPA emissions standards. Also the latest models maintain the same overall external dimensions that made the previous generation such a hit among wine and fruit farmers around the world. With increased power and torque across all models (95 to 116 HP), farmers can choose between 4-cylinder configurations. These engines can also run on alternative fuels like HVO, enhancing environmental sustainability by reducing CO₂ emissions.

SAFETY AND AGILITY AT TOP LEVELS

The 5 DF Platform ensures top-level safety and agility with a strong standard front axle featuring front brakes for true 4-wheel braking. An optional independent front axle suspension reduces terrain harshness, ensuring impeccable dynamic behavior and the superlative precision necessary when working under the canopy. Electrohydraulically engaged 4WD and differential locks, along with an automatic 4WD function, enhance maneuverability and reduce tire wear. Additional agility is provided by the SDD function, which halves the steering wheel turns.



5 DF PLATFORM.

TAILORED INNOVATION FOR YOUR AGRICULTURAL NEEDS.



ORM



FULLY CUSTOMIZABLE HYDRAULICS


DEUTZ-FAHR 5 DF Platform addresses the increasing demand for hydraulic flow and couplers in vineyards and orchards. The highly configurable hydraulic system caters to diverse needs, ranging from 2 mechanical rear spool valves (4 ways) to 10 rear and 4 mid-mounted ways. Additionally, an electronic rear lift with a vibration damping system enhances comfort during high-speed transfers with mounted implements.

COMFORT WITHOUT COMPROMISE

Thanks to their low profile, 5 DF Platform tractors nimbly enter in all orchards, citrus growing or vineyards. Two platform height options accommodate various tire sizes while maintaining a minimal mudguard height of 1.18 m. The driving area prioritizes comfort, featuring a suspended platform on 4 Hydro-Silent Blocks. Optionally, a pneumatic suspension for the driver seat is available. The ergonomic side console groups main controls, color-coded for easy identification.

STATE-OF-ART TRANSMISSIONS

The 5 DF Platform provides a diverse range of transmission layouts, including a fully mechanical 15+15 gearbox and the advanced 45+45 transmission with HML 3-step powershift. It features PowerShuttle with SenseClutch, Stop&Go, and ComfortClutch functions. Despite all versions capable of reaching a top speed of 40 km/h, five speed variants allow for optimal fuel economy during road transport or inter-site travel at lower engine speeds.



The 5 DF Platform range offers three models (95 to 116 HP) with 4-cylinder engines, 2174 mm wheelbase and a variety of transmission, hydraulics, and accessory options. Integration of powerful engines like FARMotion 45, coupled with high-performance transmissions, ensures top-class performance and fuel efficiency. These tractors, suitable for kiwi and table grape vineyards, feature low mudguard heights, a tapered bonnet, and exceptional agility. Despite lacking a cab, comfort remains a priority with features like a 4 Hydro-Silent Block suspended platform, pneumatic suspension for the driver seat, independent front axle suspension, and an electronic rear lift with a vibration damping system.

// ENGINE

Higher torque and higher power to maximise your output.

The beating heart of the new 5 DF Platform models are the multiple award-winning FARMotion 45 engines, that are now not only EPA compliant but also more powerful and fuel efficient than before. On top of this, scheduled service intervals have been extended to 600 hours. FARMotion 45 can be fuelled up with alternative fuels, being officially certified for run with HVO (Hydrotreated Vegetable Oil). 5 DF Platform tractors are therefore ready to tackle the challenges of the agriculture of tomorrow, such as increasing environmental sustainability through CO₂ reduction.

The new Series 5 DF Platform models are powered by the latest evolution of the FARMotion 45 engines, powerplants developed with the best technological solutions currently existing for diesel engines and conceived specifically to cater for the needs of agricultural applications. Offered as 4 cylinder versions, the engines of the new family are extremely compact in size, even offering the highest displacement in the market, contributing to the excellent forward visibility and generous maximum steering angle of these tractors. Together, features such as the innovative geometry of the combustion chamber, fully electronically managed Common Rail injection (with injection pressures up to 2000 bar), the viscostatic fan and a PowerCore air filter form an impressive package of high-tech solutions allowing the new 5 DF Platform models to minimise fuel consumption and maximise productivity. The innovative technology introduced to attain compliance with EPA emissions standards has been wisely integrated in the vehicle by DEUTZ-FAHR. The new 5 DF Platform models keep the same overall best in class dimensions of the predecessors, therefore the EPA upgrade did not impact on visibility and manoeuvrability, that are crucial requisites of a specialised tractor.

HIGHLIGHTS

- > Improved efficiency and more torque and power for all models
- > Viscostatic fan for reduced power loss
- > Scheduled oil change intervals extended to 600 hours
- > Automatic hydraulic valve adjustment for minimised maintenance
- > Extended operating range due to lower fuel consumption and large fuel tanks
- > Easy starting even in very cold conditions
- > HVO certified





> Easily accessible AdBlue tank.



> Clean and organised underbonnet layout.

// TRANSMISSION AND PTO

Transmissions and PTOs tailored for the needs of your job.

The transmissions equipping the new DEUTZ-FAHR Series 5 DF platform combine supreme efficiency with extraordinary reliability. With a 5-speed main gearbox, 3 ranges and PowerShuttle (for a total of 15+15 speeds), even the base configuration allows for a top speed of 40 km/h attained at an economical engine speed of around 1800 rpm (with 28" rear tyres). For even greater versatility, 5 DF platform models can be equipped even with a 2-stage Powershift transmission (Hi-Lo) or with a 3-stage (HML) Powershift, to offer 45 speeds in total in both drive directions. In this configuration, the tractor can work at ground speeds as low as 203 m/h at maximum engine speed in the lowest ratio available, at the same time reaching 40 kph ECO – with reduced engine rpm. 5 DF Platform are also available with a hydraulic reverse shuttle with the SenseClutch function, which offers 5 user-selectable responsiveness settings. This latter variant also includes the Stop&Go function, which lets the operator stop and hold the tractor and set off using the brake pedals only, and the ComfortClutch function, for shifting gear by simply pressing a button on the gear lever without using the clutch pedal. The PTO also offers extensive possibilities for configuration. All tractors come as standard with 540, 540 ECO and 1000 rpm speed modes, selectable either with an external control or a practical control on left-hand console. To extend the capabilities of the tractor, and front 1000 PTO is also available in addition to the standard configuration. PTO output shafts are available with a versatile splined removable output stub shafts, while practical controls replicated on the rear mudguards are available to allow control from outside the tractor.



HIGHLIGHTS

- > 3 choices of transmission from 15+15 up to 45+45
- > PowerShuttle
- > Stop&Go, ComfortClutch and SenseClutch functions always available
- > Up to 3 PTO speeds



> PowerShuttle with SenseClutch 5-levels adjustment.



> Stop&Go function easily engaged via a pushbutton.



> Fully integrated front lift and front PTO.

// HYDRAULICS AND LIFTS

Incredibly configurable systems with all the power and precision you need.

The 5 DF Platform models are equipped with a robust hydraulic system that offers exceptional configurability. All configurations include a dedicated hydraulic circuit with an independent pump for the steering system. This ensures smooth steering action even at idle speed or while simultaneously operating the lift and/or distributors. The pumps feeding the lifts and distributors come in different flow rates, from 48, 56, and up to 68 l/min. These tractors can feature up to 10 rear hydraulic ways, complete with a hydraulic flow regulator and free return. Optionally, 5 DF models can be equipped with up to 4 couplers in the mid mounted position, duplicating the rear couplers, plus an additional free return. Standard features include a precise rear lift with mechanical control, while an electronic control is available as an option. The electronic rear lift allows duplicating up/down buttons on the rear fender(s) and integrates a vibration damping function, reducing oscillations caused by mounted implements. This significantly enhances safety and comfort during road travel. Regardless of the configuration, the rear lift has a maximum capacity of 3940 kg. An optional front lift with a 1500 kg capacity is also available. Integrated into the front part of the tractor, the front lift minimizes bulkiness, further enhancing the agility of these tractors.



> Up to 10 rear hydraulic couplers.



> Precise mechanical rear lift and spool valve controls.

HIGHLIGHTS

- > Powerful rear lift with up to 3940 kg capacity
- > Electronic rear lift with vibration damping system available as option
- > Up to 68 l/min hydraulic pump for spool valves and rear lift
- > Independent hydraulic system for steering circuit
- > Rear spool valves with flow regulator
- > Up to 10 rear ways and 1 free return
- > Up to 4 mid-mounted ways and 1 free return



> Comfortable electronic rear lift and spool valve controls.



> Flow divider ergonomically placed for maximum adjustability.

// AXLES AND BRAKES

Class-beating technology for increased productivity and safety.

As an alternative to the conventional swing front axle, the new 5 DF Platform tractors are also available with an exclusive adaptive hydro-pneumatic independent front suspension system, which ensures optimised damping action in relation to vehicle speed, steering angle and roll angle for unbeatable comfort and stability. The innovative active front suspension control software also includes Anti-Dive and Anti-Roll functions as standard, which significantly improve both

the safety and productivity. Anti-Dive counters sudden front suspension compression under braking to shorten stopping distances, while Anti-Roll automatically adjusts damper stiffness when cornering, stiffening the suspension of the outer wheel to keep the vehicle correctly balanced, improving stability and grip and drastically reducing roll to maximise comfort and safety. The electronic control unit also manages the DTC, an innovative electronically controlled



> Auto 4WD function automatically engage and disengage 4WD according to steering angle.



> Maximum agility ensured by generous steering angle in combination with the Auto 4WD function.



> Electronically controlled independent front axle suspension for better comfort and traction.



> SDD function halves the number of steering wheel turns required for lock-to-lock steering.

HIGHLIGHTS

- > Independent front axle suspension available as option
- > 4-wet disc brakes
- > 100% front differential lock
- > SDD available
- > Auto 4WD available

differential which maximises traction by automatically transferring torque to the wheel with the most grip. Also standard are true all-wheel braking, with wet disc brakes on all four wheels, and electro-hydraulically engaged differential locks and 4WD are standard, while automated management of the 4WD system is offered as an option. For even greater operator comfort and maneuverability, 5 DF Platform tractors are available

with the optional SDD (Steering Double Displacement) system, which significantly cuts the time and effort necessary for headland turn manoeuvres. Simply pressing the relative button halves the number of steering wheel turns needed to turn the tractor around.



// DRIVING POSITION

More innovation, less vibration.

Thanks to their low profile, 5 DF Platform tractors features extraordinary agility when working under tree branches or in low-height spaces. Even without cab, 5 DF Platform models offer to the operators outstanding levels of comfort: the revised driver zone layout is in line with latest ergonomics standards while the platform is isolated from the transmission and suspended by 4 innovative Hydro Silent-

Blocks. As an option, a pneumatic driver seat is even available in order to further decrease the vibrations to the driver. As standard equipment, a practical smartphone holder with 2 USB charging ports is available as well as the telescopic steering column which allows the driver configuring the height of steering wheel according to its preferences. To fulfil every need, the new 5 DF models are offered with two



> Height-adjustable steering column.



> 2-post foldable safety frame.



> Driver seat with pneumatic suspension for better comfort.



> External pushbuttons for the rear lift, rear PTO, and side stabilizers simplify coupling maneuvers.

HIGHLIGHTS

- > Platform suspended on 4 Hydro Silent-Blocks
- > Foldable 2-post safety frame
- > Platform available in two different mudguard heights
- > Pneumatic seat available as option
- > Smartphone holder and 2 USB plugs
- > LED driving and working lights

different platform heights. The high platform is designed in order to accommodate big rear tyres up to 28", while the low platform is designed keeping in mind the need to have a low tractor as possible for working in olive trees cultivations or citrus orchards. The low platform, in combination with the smallest tyre size, allow the tractors of Series 5 DF to have a mudguard height of just

1.18 m. As per DEUTZ-FAHR tradition, even on the 5 DF Platform models, controls are arranged following the colour coding scheme, for an easy and fast identification. When working by night, 5 DF Platform lights up the orchards thanks to a pack of LED lights which is available as option.





SDF Smart

The new tractors of the Series 5 DF Platform can be equipped with various products and services to simplify work and increase productivity.



Farming Solutions



// AGRICULTURE 4.0: FULLY CONNECTED

State of the art technology for total connectivity.

Optimise operations. Increase efficiency. Linking machines, to the office and to any other external sources simplifies various work processes. SDF Smart Farming Solutions offer practical solutions for managing key data and staying connected at all times. The user is completely free to make his own choices and decisions at any time, while all data remain the sole property of the user.

SDF Fleet Management

With the new SDF Fleet Management application, SDF offers customisable solutions for the real-time management of key data concerning the operation of the machine. Our clients benefit significantly from being in total control of their machines and from the ability to manage a host of vital data, such as tracking data relative to activities. The SDF Fleet Management suite of applications is the centralised control interface for analysing telemetry data from DEUTZ-FAHR machines. Tractor data is transmitted in real time over a mobile internet connection to the application, which allows users to analyse, monitor and even optimise the use of their machinery.

The "map" view shows the location and status of machines or an entire fleet, and can also display historical data. On request, you can set up virtual fences to receive warnings if a machine leaves the area. Error messages may be forwarded to the technical support team of the dealership, and used to predict failure and reduce unnecessary machine down time.



> Connect the 5 DF Platform models with your dealer for fast and comfortable support.





> SDF Fleet Management gives access to machine relevant data at all time.



TECHNICAL DATA		SERIES 5 DF PLATFORM		
		95	105	115
ENGINE				
Model		FARMotion 45		
Emission level		EPA		
Aspiration		Turbo Intercooler		
Injection @ pressure	Type	Common Rail @ 2000 bar		
Cylinder/Displacement	n°/cc	4/3849	4/3849	
Max. power (ECE R120)	kW/HP	70/95	78/106	85/116
Power at rated engine speed (ECE R120)	kW/HP	66.4/90	74/101	80.6/110
Max torque @ 1400 rpm	Nm	389	433	472
Fuel tank capacity	l		82	
Adblue tank capacity	l		13	
TRANSMISSION - POWERSHUTTLE				
Number of speeds - 5 gears transmission		15+15 or 30+30 (with Hi-Lo 2-Powershift steps) or 45+45 (with HML 3-Powershift steps)		
Max. speed - 5 gears transmission	km/h	40 ECO*		
PTO				
PTO speeds		540/540ECO/1000		
Front PTO		○		
LIFT				
Mechanical rear lift		●		
Electronic rear lift		○		
Rear lift capacity (STD/OPT)	kg	3130/3940		
Hydraulic right tie rod and stabilisers		○		
Front lift (1500 kg)		○		
HYDRAULICS				
Open centre hydraulic system (STD/OPT)	l/min	48/56		
Open centre hydraulic system with double pump (OPT)	l/min	68		
Flow divider for simultaneous use of rear lift and spool valves		○		
Rear hydraulic ways (STD/OPT)	n°	4/6/10		
Flow regulator		○		
Rear free return		●		
Mid-mounted hydraulic ways - duplicated from rear (OPT)	n° of ways	4		
Mid-mounted free return		●		
BRAKES				
4 wheel braking		●		
Hydraulic trailer brake		○		
FRONT AXLE				
Electrohydraulic engagement for 4WD and Diff.Lock		●		
Independent steering pump		●		
ACTIVEDRIVE (OPT)				
Adaptive-Damping, Active Self-Levelling functions		●		
Anti-Dive, Anti-Roll functions		●		
Differential Traction Control (DTC)		●		
DRIVING POSITION				
Welded platform with tunnel		●		
2-post foldable safety frame		○		
Suspended on Hydro Silent-Block		●		
Driver seat with mechanical suspension		●		
Driver seat with pneumatic suspension		○		
Height adjustment of steering column		●		
Smartphone holder with 2 USB chargers		●		
LED driving and working lights		○		
CTM		●		

● = standard ○ = option – = not available

*according to rear tyres size.

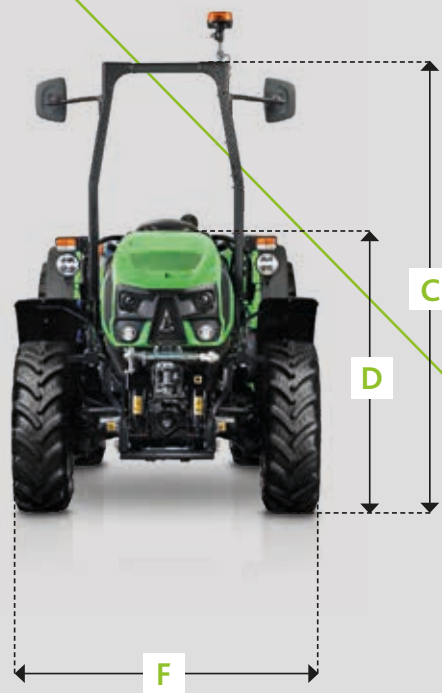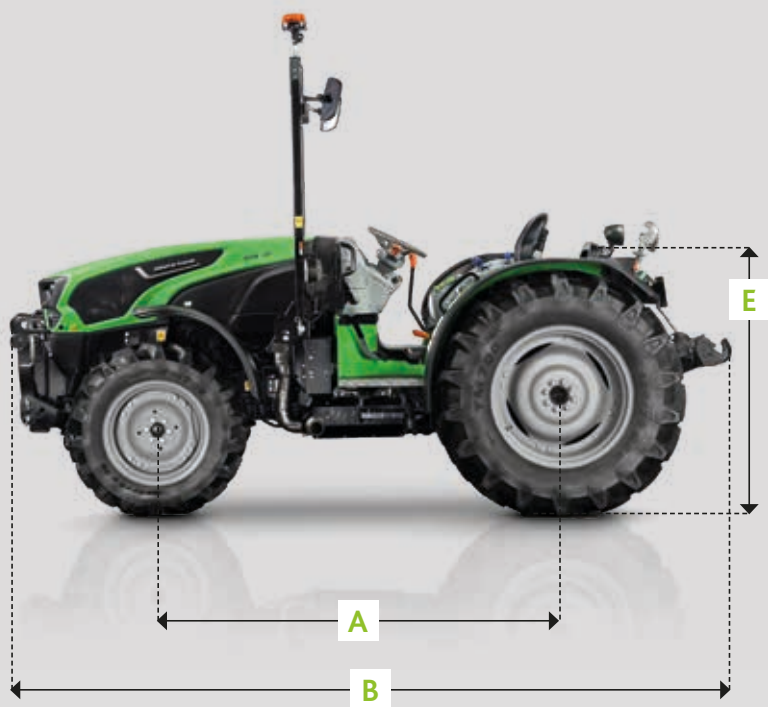

TECHNICAL DATA		SERIES 5 DF PLATFORM		
		95	105	115
DIMENSIONS AND WEIGHTS				
With front tyre	Size		240/70 R16	
With rear tyre	Size		380/70 R20	
Wheelbase (A)	mm		2174	
Max. length (B)	mm		3955	
Total height - ROPS (C)	mm		2355	
Height at bonnet (D)	mm		1351	
Height at mudguards (E)			1351	
Width (F)	mm		1540	
Weight	kg		2650	
Total admissible load	kg		5000	

Technical data and figures are only provided for guidance. DEUTZ-FAHR is committed to continuously adapting its products to your requirements and therefore reserves the right to make updates without prior notice.


Models and options may vary depending on the market. Please contact your dealer/distributor for more information.

Marketing-Communication Service - Code 308.8928.3.4-0 - 08/24

To discover more please contact your dealer or visit deutz-fahr.com



Follow us on   

DEUTZ-FAHR is a brand of  SDF

